

# **AQUA ENERGY UH DL/267/400**

## **ULTRA HIGH PRESSURE PUMP**

**AQUA ENERGY INTERNATIONAL LTD**

**28 St James Business Centre, Linwood Road**

**Paisley PA3 3AT**


**Scotland, U.K.**

**Tel: (+44) (0) 141 849 6888**

**Fax: (+44) (0) 141 848 5777**

**E-mail: sales@aquaenergy.com**

**www.aquaenergy.com**

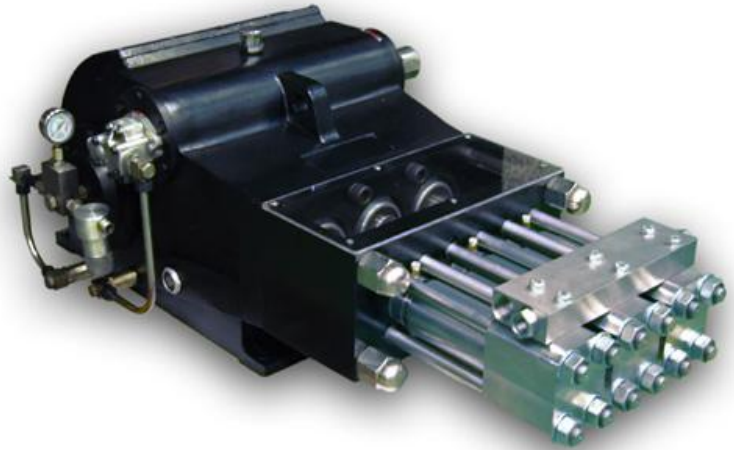

The DL 267 / 400 pump can be easily converted to run from 1300 bar to 3200 bar with flow rates from 42.00 l/min up to 106.00 l/min.

### **Technical Data:**

**Stroke:** 130mm

**Weight:** 1760 lbs (800kg)

**Physical Size:** 53.5" x 35.8" x 19.7" (1359mm x 909mm x 500 mm)

Model	Required Power Rating, kW (Hp)			Flow Rate	Power Speed r.p.m.	Pump Speed r.p.m.
	200 (267)	250 (333)	300 (400)			
	Operating Pressure, bar (psi)					
H-300-18	2,550 (37,000)	3,200 (46,000)		42 (11.3)	1,500	429
	2,150 (31,000)	2,700 (39,000)	3,000 (43,000)	51 (13.5)	1,800	514
H-300-20	2,100 (30,000)	2,600 (37,000)	3,000 (43,000)	52 (13.9)	1,500	429
	1,750 (25,000)	2,150 (31,000)	2,600 (37,000)	63 (16.6)	1,800	514
H-300-22	1,750 (25,000)	2,150 (31,000)	2,550 (36,000)	63 (16.8)	1,500	429
	1,450 (21,000)	1,800 (26,000)	2,150 (31,000)	76 (20.1)	1,800	514
H-300-24	1,450 (21,000)	1,800 (26,000)	2,150 (31,000)	75 (20.0)	1,500	429
	1,200 (17,000)	1,500 (21,000)	1,800 (26,000)	90 (24.0)	1,800	514
H-300-26	1,250 (18,000)	1,550 (22,000)	1,850 (27,000)	88 (23.5)	1,500	429
	1,050 (15,000)	1,300 (18,000)	1,550 (22,000)	106 (28.1)	1,800	514

### **FEATURES**

- \* Triplex Plunger Pump
- \* 4 UHP outlet port on manifold
- \* Solid tungsten carbide plungers
- \* Force feed oil pump
- \* Built-in Gear box
- \* Compact design
- \* Fastest Field Maintenance

### **APPLICATIONS**

- \* Water Blasting
- \* Surface Preparation (Paint Removal)
- \* Concrete Demolition
- \* Cold Cutting
- \* Runway Cleaning
- \* Tank and Pipe Cleaning
- \* Ship Descaling