

AQUA ENERGY

**Basic Skid Mounted
High & Ultra Pressure Water Jetting Units**
Option of Offshore Crash-Frames & Sound Attenuated Canopies
Offshore models conform to the following Regulations
Rig-Safe, BP-200, OCMA-MEC-1 or DNV

Model: DS-105-BS




PERFORMANCE

3,500 bar @ 12.00 l/min
1,500 bar @ 27.00 l/min
1,200 bar @ 34.00 l/min
900 bar @ 42.00 l/min
750 bar @ 50.00 l/min
600 bar @ 63.00 l/min

Model: DS-150-BS

PERFORMANCE

3,500 bar @ 16.50 l/min
1,400 bar @ 44.00 l/min
1,100 bar @ 53.00 l/min
950 bar @ 63.00 l/min
800 bar @ 74.00 l/min
700 bar @ 86.00 l/min
600 bar @ 98.00 l/min

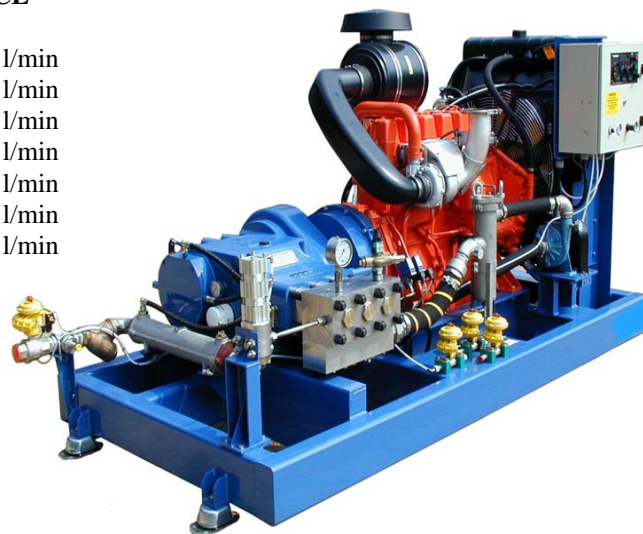

Aqua Energy International Limited, St James Business Centre, Linwood Road
Paisley PA3 3AT, Scotland, UK
Tel: (+44) (0) 141 849 6888 Fax: (+44) (0) 141 848 5777
E-mail: info@aquaenergy.com

DS-100 DS-150

Standard Features

Pump- DS horizontal triplex positive displacement pump, rated up to 150 HP service.

Plunger pump consists of stainless steel fluid cylinders, solid ceramic plungers, stainless steel valves and seats with chevron packing. The plungers and packing are water lubricated. The power end of the DS series pump is positive splash oil lubricated with sight glass for oil level check. Crankshaft is made of high strength alloy steel. Main bearing is roller.

Suction Plumbing- Water filter 5 micron capacity protects pump.
50 gallon water storage tank with ball cock and float.

Discharge Plumbing- Discharge manifold with interchangeable high pressure discharge connections for pressure gauge, relief valve, rupture disc and hose couplings. Stainless steel glycerine filled pressure gauge, stainless steel snubber assembly, Rupture disc or relief valve.

Unit Mounting- Mounted on a steel channel frame with pump base and anti-vibration mountings. Steel plate top deck.

Engines- Perkins 1104 & 1006 series, can be supplied to conform to offshore Zone-2 specifications.

Power Transmission- Direct Drive via a reduction gearbox or belt drive.

Finish System- Units are zinc primed and have one coat of industrial blue (or choice of colour) enamel. Coating for corrosive atmospheres are available.

Optional Accessories:

Gun- Hand or foot dump control type with safety shroud, whip hose and coupling.

Hoses- High Pressure for use at pressures up to 50,000 psi.

Lances- Rigid and flexible variety SAE, JIC, pipe and welded end connections.

Nozzles- Wide assortment for surface and tube cleaning.

Rotary- Surface Preparation Jet for coatings removal and descaling

Regulator- Variable flow and pressure adjustment. Controlled by hand or mechanical actuation.

Auto-Throttle- Variable engine speed adjustments with automatic return to idle when Aqua-Gun is depressurised.

Vacuum- Uses the Jet-Blaster pump to create a vacuum for sludge and slurry transport.

Line Mole- Pipe and sewer cleaning type with replaceable fan and round jet inserts.

Abrasive Injector- Aqua-Saw abrasive injector mixes abrasive into Aqua-Gun discharge stream.

Deck Cleaner- Rotary jet driven multi-nozzle floor and grate cleaning system with hand operated controls.

Couplings- Quick disconnect Acme thread rated at up to 20,000-psi working pressure. Optional snap type for use to 10,000 psi.

For further information contact: Aqua Energy International Limited
St James Business Centre
Linwood Road,
Paisley PA3 3AT, Scotland UK
Tel: (+44) (0) 141 849 6888
Fax: (+44) (0) 141 848 5777
E-mail: info@aquaenergy.com
www.aquaenergy.com